



RCA-6J7

Triple-Grid Detector Amplifier

The 6J7 is a triple-grid type of metal tube recommended especially for service as a biased detector in radio receivers designed for its characteristics. In such service, this tube is capable of delivering a large audio-frequency output voltage with relatively small input voltage. Other applications of the 6J7 include its use as a high-gain amplifier tube.

TENTATIVE CHARACTERISTICS

HEATER VOLTAGE (A.C. or D.C.)	6.3	Volts
HEATER CURRENT	0.3	Ampere
PLATE VOLTAGE	100	250 max. Volts
SCREEN (Grid No.2) VOLTAGE	100	100 ** Volts
GRID (Grid No.1) VOLTAGE	-3	-3 Volts
SUPPRESSOR (Grid No.3)	Connected to cathode at socket	
PLATE CURRENT	2	2 Milliampere
SCREEN CURRENT	0.5	0.5 Milliampere
PLATE RESISTANCE	1.0	Greater than 1.5 Megohms
AMPLIFICATION FACTOR	1185	Greater than 1500
MUTUAL CONDUCTANCE	1185	1225 Micromhos
GRID VOLTAGE (Approx.) #	-7	-7 Volts
GRID-PLATE CAPACITANCE °		0.005 max. µf
INPUT CAPACITANCE °		7 µf
OUTPUT CAPACITANCE °		12 µf
MAXIMUM OVERALL LENGTH		3-1/8"
MAXIMUM DIAMETER		1-5/16"
CAP		Miniature
BASE		Small Octal 7-Pin

* If a grid-coupling resistor is used, its maximum value should not exceed 1.0 megohm.

** Maximum Screen Volts = 125.

For cathode current cut-off.

° With shell connected to cathode.

INSTALLATION

The base pins of the 6J7 fit the seven-contact octal-base socket (or the universal eight-contact socket) which may be installed to hold the tube in any position.

For heater operation and cathode connection, refer to INSTALLATION for type 6A8.

The screen voltage may be obtained from a potentiometer or bleeder circuit across the B-supply source. Due to the screen-current characteristics of the 6J7, a resistor in series with the high-voltage supply may be employed for obtaining the screen voltage, pro-

vided the cathode-resistor method of bias control is used. This method, however, is not recommended if the high-voltage B-supply exceeds 250 volts.

APPLICATION

As a *biased detector*, the 6J7 can deliver a large audio-frequency output voltage of good quality with a fairly small radio-frequency signal input. Typical recommended conditions for the 6J7 as a biased detector are as follows:

PLATE SUPPLY *	250	250	250	250	Volts
SCREEN VOLTAGE	50	33	100	100	Volts
GRID VOLTAGE	-2	-1.7	-3.9	-4.3	Volts
CATHODE RESISTOR	3000	8000	4000	10000	Ohms
SUPPRESSOR	Connected to cathode at socket				
CATHODE CUR. (Zero signal)	0.65	0.21	0.97	0.43	Milliamperes
PLATE RESISTOR	0.25	0.50	0.25	0.50	Megohm
BLOCKING CONDENSER	0.03	0.03	0.03	0.03	μf
GRID RESISTOR #	0.25	0.25	0.25	0.25	Megohm
R-F SIGNAL (RMS) **	1.18	1.21	1.38	1.37	Volts

* Voltage at plate will be PLATE-SUPPLY voltage less voltage drop in plate resistor caused by plate current.


For the following amplifier tube.

** With these signal voltages modulated 20%, the voltage output under each set of operating conditions is 17 peak volts at the grid of the following amplifier, a value sufficient to insure full audio output from a type 6F6 at 250 volts on plate.

Detector bias may be obtained from a bleeder circuit, from a resistor in the cathode circuit, or from a partial self-biasing circuit. The cathode-resistor method permits of higher output at low percentage modulation, since the input signal may be increased almost in inverse proportion to the modulation without resulting in objectionable distortion.


As an *audio-frequency pentode* in resistance-coupled circuits, the 6J7 may be operated as shown in the tables on page 150 of the RC-12 Manual for the types 57, 77, and 6C6.

As a *radio-frequency amplifier pentode*, the 6J7 may be used particularly in applications where the r-f signal applied to the grid is relatively low, that is, of the order of a few volts. In such cases either screen or control-grid voltage (or both) may be varied to control the receiver volume. When larger signals are involved, a super-control amplifier tube should be employed to prevent the occurrence of excessive cross-modulation and modulation-distortion. Recommended operating conditions for amplifier service are given under CHARACTERISTICS.



BOTTOM VIEW

AVERAGE PLATE CHARACTERISTICS

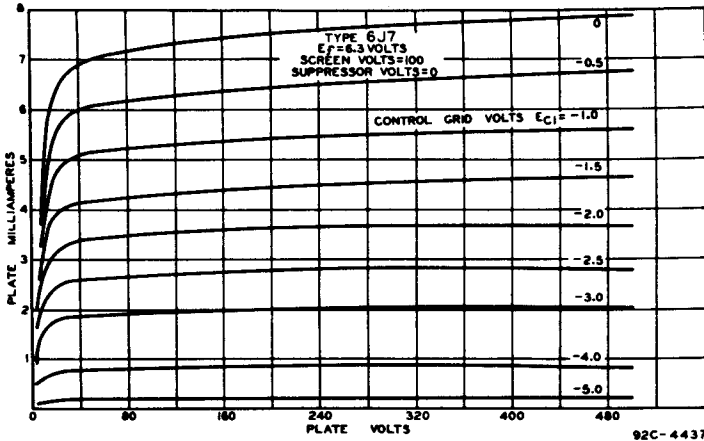

AVERAGE PLATE CHARACTERISTICS

