

Remote-Cutoff Pentode

7-PIN MINIATURE TYPE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:		
Voltage (AC or DC)	18	volts
Current	0.1 ± 6%	amp
Direct Interelectrode Capacitances:▲		
Grid No.1 to plate.	0.0035 max.	μμf
Grid No.1 to cathode, grid No.3, grid No.2, and heater	5.5	μμf
Plate to cathode, grid No.3, grid No.2, and heater	5	μμf

Characteristics, Class A₁ Amplifier:

Plate Supply Voltage.	100	volts
Grid No.3	<i>Connected to cathode at socket</i>	
Grid-No.2 Supply Voltage.	100	volts
Cathode Resistor.	68	ohms
Plate Resistance (Approx.)	0.25	megohm
Transconductance.	4400	μmhos
Plate Current	11	ma
Grid-No.2 Current	4.4	ma
Grid-No.1 Voltage (Approx.) for transconductance (μmhos) = 25	-20	volts

Mechanical:

Operating Position.	Any
Maximum Overall Length.	2-1/8"
Maximum Seated Length	1-7/8"
Length, Base Seat to Bulb Top (Excluding tip)	1-1/2" ± 3/32"
Diameter.	0.650" to 0.750"
Dimensional Outline	See <i>General Section</i>
Bulb.	T5-1/2
Base.	Small-Button Miniature 7-Pin (JEDEC No. E7-1)
Basing Designation for BOTTOM VIEW.	7CC

Pin 1 - Grid No.1
Pin 2 - Grid No.3,
Internal
Shield
Pin 3 - Heater



Pin 4 - Heater
Pin 5 - Plate
Pin 6 - Grid No.2
Pin 7 - Cathode

AMPLIFIER — Class A₁

Maximum Ratings, Design-Maximum Values:

PLATE VOLTAGE	150 max.	volts
GRID No.3 (SUPPRESSOR GRID)	<i>Connected to cathode at socket</i>	
GRID-No.2 (SCREEN-GRID) SUPPLY VOLTAGE.	150 max.	volts

← Indicates a change.



18FW6

GRID-No.2 VOLTAGESee *Grid-No.2 Input Rating Chart*
at front of Receiving Tube Section

GRID-No.2 INPUT:

For grid-No.2 voltages up to 75 volts . . . 0.6 max. watt

For grid-No.2 voltages between 75

and 150 voltsSee *Grid-No.2 Input Rating Chart*
at front of Receiving Tube Section

PLATE DISSIPATION 2.5 max. watts

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode . . 100 max. volts


Heater positive with respect to cathode . . 100 max. volts

▲ With external shield JEDEC No.316 connected to cathode.



AVERAGE CHARACTERISTICS

$E_f = 18$ VOLTS
 PLATE VOLTS = 100
 GRID N^o3 CONNECTED TO
 CATHODE AT SOCKET.
 GRID-N^o2 VOLTS = 100

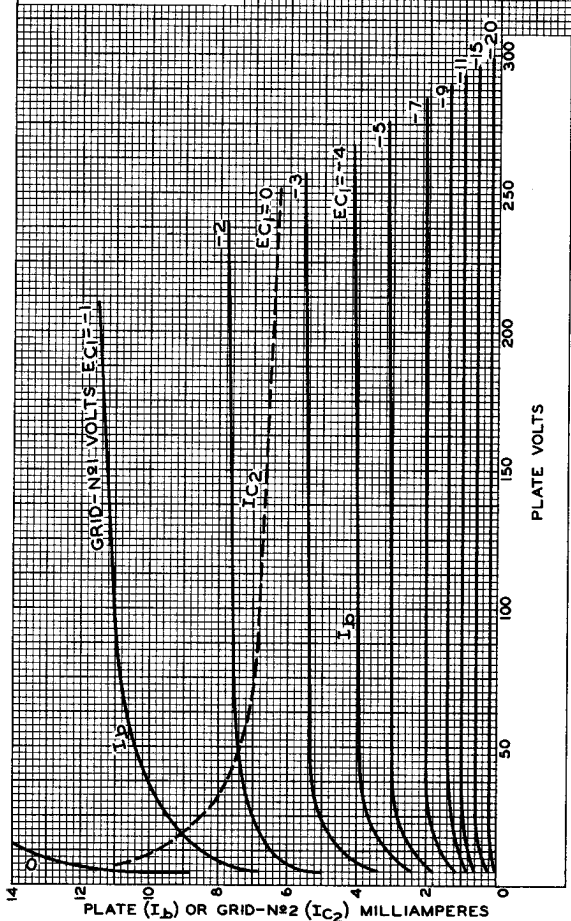


92CM-10778



18FW6

AVERAGE CHARACTERISTICS

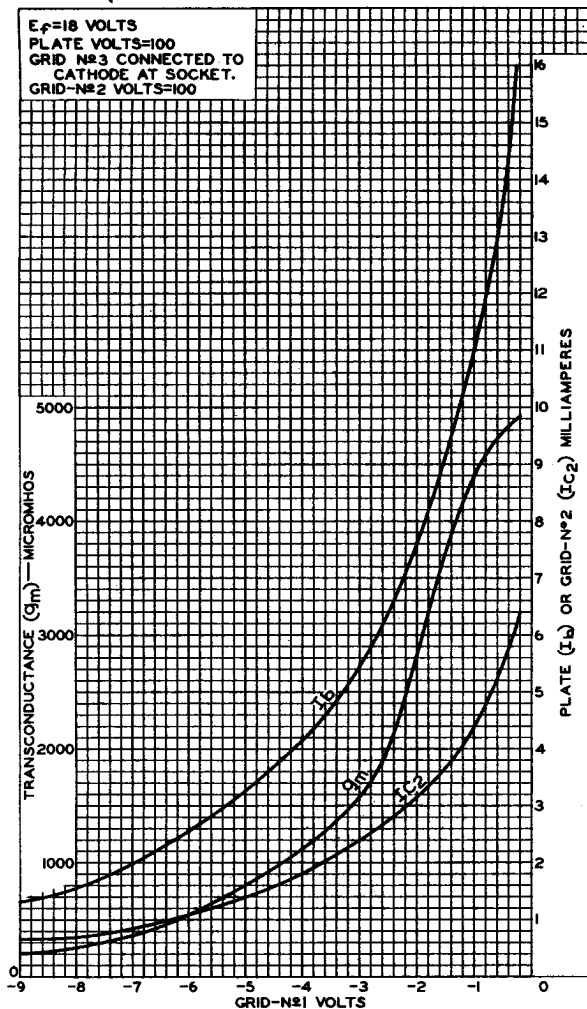

92CM-10776

