

Medium-Mu Triode

NUVISTOR TYPE

Having Gold-Plated Envelope and Base Pins to Assure Positive Grounding and Low Pin-Contact Resistance for Oscillator Applications at UHF Frequencies

GENERAL DATA

Electrical:

Heater Characteristics and Ratings (<i>Design-Maximum Values</i>):		
Voltage (AC or DC)	6.3 ± 0.6	volts
Current at heater volts = 6.3	0.135	amp
Peak heater-cathode voltage:		
Heater negative with respect to cathode.	100 max.	volts
Heater positive with respect to cathode.	100 max.	volts
Direct Interelectrode Capacitances (Approx.):		
Grid to plate	1.8	pf
Grid to cathode, shell, and heater.	4.4	pf
Plate to cathode, shell, and heater	1.9	pf
Plate to cathode.	0.25	pf
Heater to cathode	1.4	pf
Grid to cathode	3.7	pf

Characteristics, Class A₁ Amplifier:

Plate Supply Voltage.	75	volts
Cathode Resistor.	100	ohms
Amplification Factor.	35	
Plate Resistance (Approx.).	3100	ohms
Transconductance.	11500	μmhos
Plate Current	10.5	ma
Grid Voltage (Approx.) for plate $\mu a = 10$	-7	volts

Mechanical:


Operating Position.	Any
Type of Cathode	Coated Unipotential
Maximum Overall Length.	0.800"
Maximum Seated Length	0.625"
Maximum Diameter.	0.440"
Envelope.	Metal Shell MT4
Socket.	Industrial Electronic Hardware Corp. No. MSN0707-1, or equivalent
Base.	Medium Ceramic-Wafer Twelvar 7-Pin (JEDEC No.E7-83)



6DV4

Basing Designation for BOTTOM VIEW. 12EA

- Pin 1-Plate
- Pin 2-Plate
- Pin 3^a-Do Not Use
- Pin 4-Grid
- Pin 5-Same as Pin 3
- Pin 6-Grid
- Pin 7-Cathode
- Pin 8-Same as Pin 3
- Pin 9-Same as Pin 3
- Pin 10-Heater
- Pin 12-Heater



INDEX = LARGE LUG
● = SHORT PIN

AMPLIFIER — Class A₁

Maximum Ratings, Design-Maximum Values:

PLATE SUPPLY VOLTAGE.	300 ^b max.	volts
PLATE VOLTAGE	125 max.	volts
GRID VOLTAGE:		
Negative-bias value	55 max.	volts
Peak-positive value	2 max.	volts
CATHODE CURRENT	15 max.	ma
PLATE DISSIPATION	1 max.	watt

Typical Operation:

As oscillator at 950 Mc

Plate Voltage	60	volts
Grid Voltage.	-2	volts
Grid Resistor	5600	ohms
Plate Current	8	ma
Grid Current.	350	μa

Maximum Circuit Values:

Grid-Circuit Resistance:^c



For fixed-bias operation.	0.1 max.	megohm
For cathode-bias operation.	0.2 max.	megohm

^a Pin 1s of a length such that its end does not touch the socket insertion plane.

^b A plate supply voltage of 300 volts may be used provided that a sufficiently large resistor is used in the plate circuit to limit the plate dissipation to one watt under any condition of operation.

^c For operation at metal-shell temperatures up to 135° C.



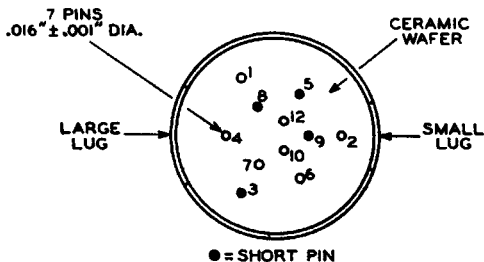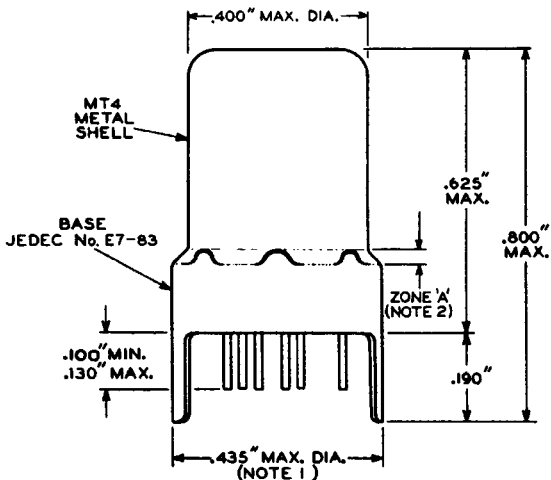

92CS-11782RI


NOTE 1: MAXIMUM OUTSIDE DIAMETER OF 0.440" IS PERMITTED ALONG 0.190" LUG LENGTH.

NOTE 2: SHELL TEMPERATURE SHOULD BE MEASURED IN ZONE "A" BETWEEN BROKEN LINES.



6DV4


AVERAGE PLATE CHARACTERISTICS

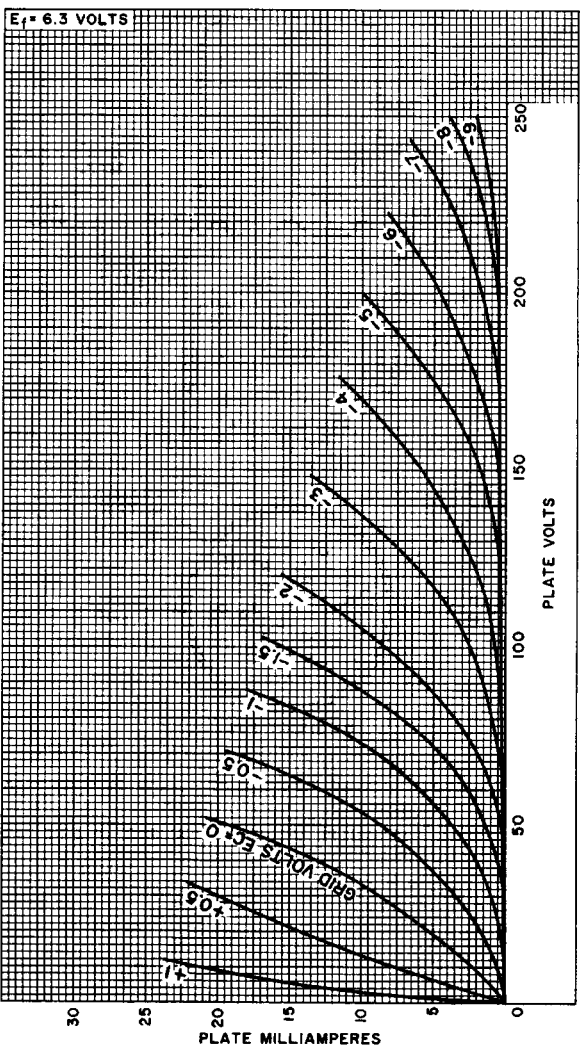

92CM-11781



AVERAGE CHARACTERISTICS

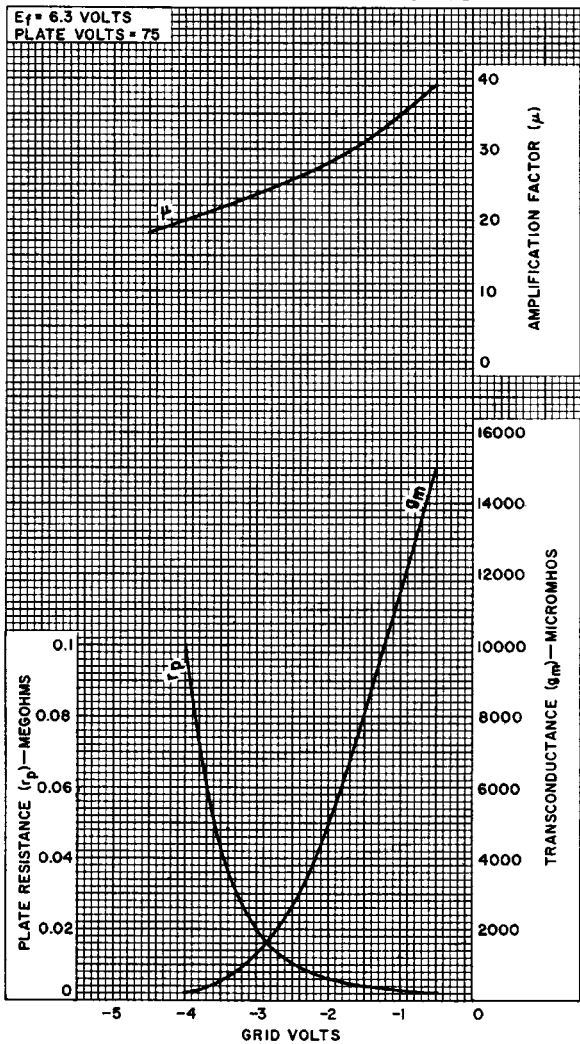


92CM-11780



6DV4

AVERAGE CHARACTERISTICS

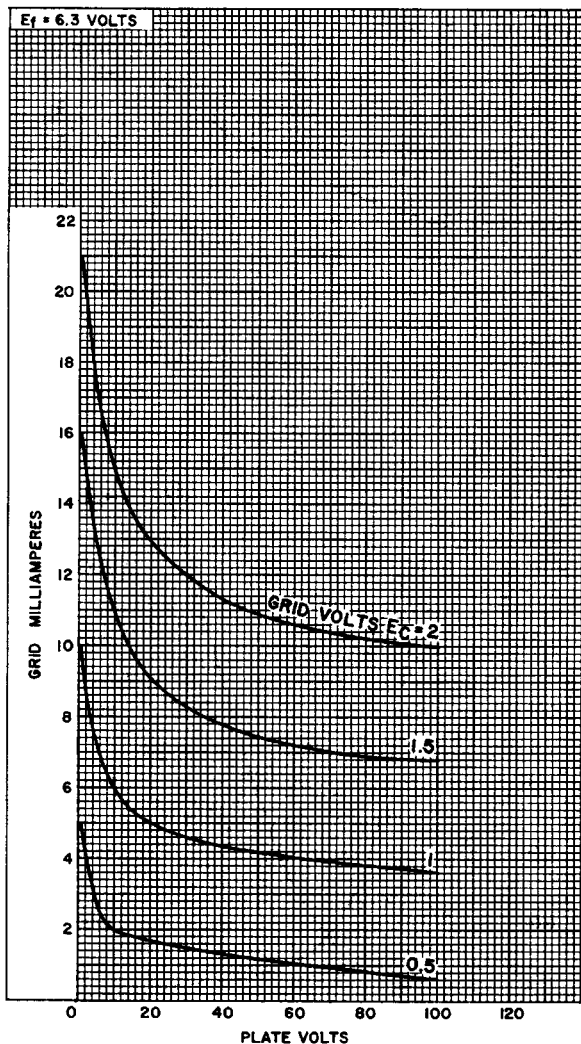

92CM-11779

