

Power Pentode

9-PIN MINIATURE TYPE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage (AC or DC) 6.3 \pm 10% volts

Current at 6.3 volts. 0.76 amp

Direct Interelectrode Capacitances:^aGrid No.1 to plate. 0.14 max. $\mu\mu\text{f}$ Grid No.1 to cathode, grid No.3
& internal shield, grid No.2,
and heater. 10 $\mu\mu\text{f}$ Plate to cathode, grid No.3
& internal shield, grid No.2,
and heater. 7 $\mu\mu\text{f}$ Characteristics, Class A₁ Amplifier:

Plate Supply Voltage. 250 volts

Grid-No.2 Supply Voltage. 250 volts

Cathode Resistor. 135 ohms

Mu-Factor, Grid No.2 to Grid No.1 19

Plate Resistance (Approx.). 38000 ohms

Transconductance. 11300 μmhos

Plate Current 48 ma

Grid-No.2 Current 5.5 ma

Mechanical:

Operating Position. Any

Maximum Overall Length. 3-1/16"

Maximum Seated Length 2-13/16"

Length, Base Seat to Bulb Top (Excluding tip) 2-7/16" \pm 3/32"

Diameter. 0.750" to 0.875"

Dimensional Outline See *General Section*

Bulb. T6-1/2

Base. Small-Button Noval 9-Pin (JEDEC No.E9-1)

Basing Designation for BOTTOM VIEW. 9GK

Pin 1 - Cathode

Pin 2 - Grid No.1


Pin 3 - Grid No.3,

Internal

Shield

Pin 4 - Heater

Pin 5 - Heater

Pin 6 - No Connec-
tion

Pin 7 - Plate

Pin 8 - Grid No.2

Pin 9 - Grid No.3,

Internal

Shield

AF POWER AMPLIFIER — Class A₁

Maximum Ratings, Design-Maximum Values:

PLATE SUPPLY VOLTAGE. 600 max. volts

PLATE VOLTAGE 330 max. volts

GRID-No.2 SUPPLY VOLTAGE. 600 max. volts

GRID-No.2 (SCREEN-GRID) VOLTAGE 330 max. volts



6GK6

GRID-No.1 (CONTROL-GRID) VOLTAGE:

Negative-bias value	100 max.	volts
CATHODE CURRENT	65 max.	ma

GRID-No.2 INPUT:

Peak	4 max.	watts
Average	2 max.	watts
PLATE DISSIPATION	13.2 max.	watts

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode. .	100 max.	volts
Heater positive with respect to cathode. .	100 max.	volts

Typical Operation:

Plate Supply Voltage.	250	volts
Grid-No.2 Supply Voltage.	250	volts
Cathode Resistor.	135	ohms
Peak AF Grid-No.1 Voltage	7.3	volts
Zero-Signal Plate Current	48	ma
Max.-Signal Plate Current	50.6	ma
Zero-Signal Grid-No.2 Current	5.5	ma
Max.-Signal Grid-No.2 Current	10	ma
Effective Load Resistance	5200	ohms
Total Harmonic Distortion	10	%
Max.-Signal Power Output.	5.7	watts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

For fixed-bias operation.	0.3 max.	megohm
For cathode-bias operation.	1 max.	megohm

PUSH-PULL AF POWER AMPLIFIER — Class AB₁

Maximum Ratings, Design-Maximum Values:

PLATE SUPPLY VOLTAGE.	600 max.	volts
PLATE VOLTAGE	330 max.	volts
GRID-No.2 SUPPLY VOLTAGE.	600 max.	volts
GRID-No.2 (SCREEN-GRID) VOLTAGE	330 max.	volts
GRID-No.1 (CONTROL-GRID) VOLTAGE:		
Negative-bias value	100 max.	volts
CATHODE CURRENT	65 max.	ma
GRID-No.2 INPUT:		
Peak	4 max.	watts
Average	2 max.	watts
PLATE DISSIPATION	13.2 max.	watts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode. .	100 max.	volts
Heater positive with respect to cathode. .	100 max.	volts

Typical Operation:

Values are for 2 tubes

Plate Supply Voltage.	250	300	volts
Grid-No.2 Supply Voltage.	250	300	volts
Cathode Resistor.	130	130	ohms
Peak AF Grid-No.1-to-Grid-No.1 Voltage. . .	22.4	28	volts
Zero-Signal Plate Current	62	72	ma



Max.-Signal Plate Current	75	92	ma
Zero-Signal Grid-No.2 Current	7	8	ma
Max.-Signal Grid-No.2 Current	15	22	ma
Effective Load Resistance (Plate to plate).	8000	8000	ohms
Total Harmonic Distortion	3	4	%
Max.-Signal Power Output.	11	17	watts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

For fixed-bias operation.	0.3 max.	megohm
For cathode-bias operation.	1 max.	megohm

PUSH-PULL AF POWER AMPLIFIER — Class B

Maximum Ratings, Design-Maximum Values:

PLATE SUPPLY VOLTAGE.	600 max.	volts
PLATE VOLTAGE	330 max.	volts
GRID-No.2 SUPPLY VOLTAGE.	600 max.	volts
GRID-No.2 (SCREEN-GRID) VOLTAGE	330 max.	volts
GRID-No.1 (CONTROL-GRID) VOLTAGE:		
Negative-bias value	100 max.	volts
CATHODE CURRENT	65 max.	ma
GRID-No.2 INPUT:		
Peak.	4 max.	watts
Average	2 max.	watts
PLATE DISSIPATION	13.2 max.	watts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode. .	100 max.	volts
Heater positive with respect to cathode. .	100 max.	volts

Typical Operation:

Values are for 2 tubes

Plate Voltage	250	300	volts
Grid-No.2 Voltage	250	300	volts
Grid-No.1 Voltage	-11.6	-14.7	volts
Peak AF Grid-No.1-to-Grid-No.1 Voltage. .	22.4	28	volts
Zero-Signal Plate Current	20	15	ma
Max.-Signal Plate Current	75	92	ma
Zero-Signal Grid-No.2 Current	2.2	1.6	ma
Max.-Signal Grid-No.2 Current	15	22	ma
Effective Load Resistance (Plate to plate).	8000	8000	ohms
Total Harmonic Distortion	3	4	%
Max.-Signal Power Output.	11	17	watts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:


For fixed-bias operation.	0.3 max.	megohm
For cathode-bias operation.	1 max.	megohm

^a Without external shield.



6GK6


AVERAGE CHARACTERISTICS

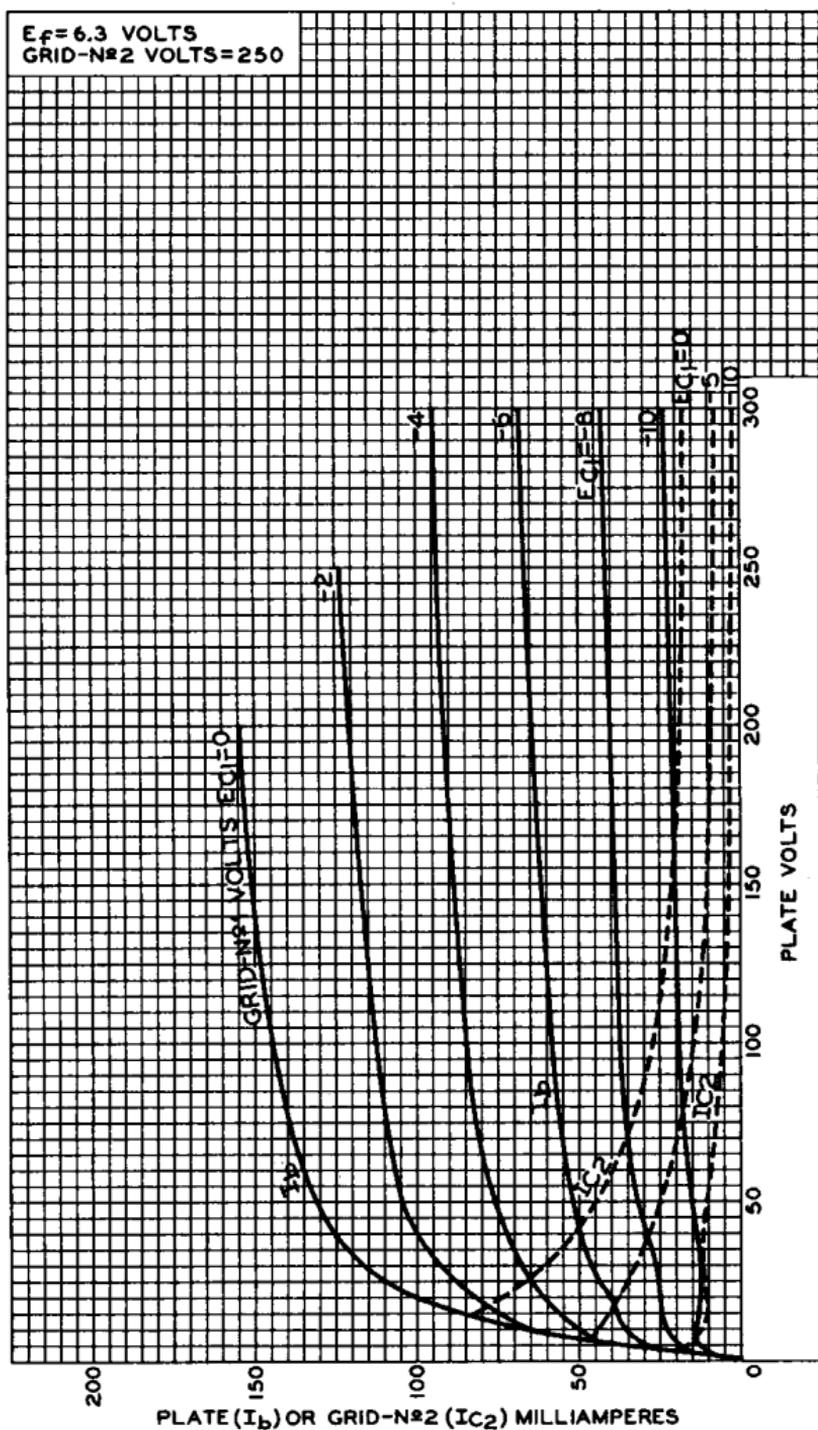

92CM-9903



OPERATION CHARACTERISTICS

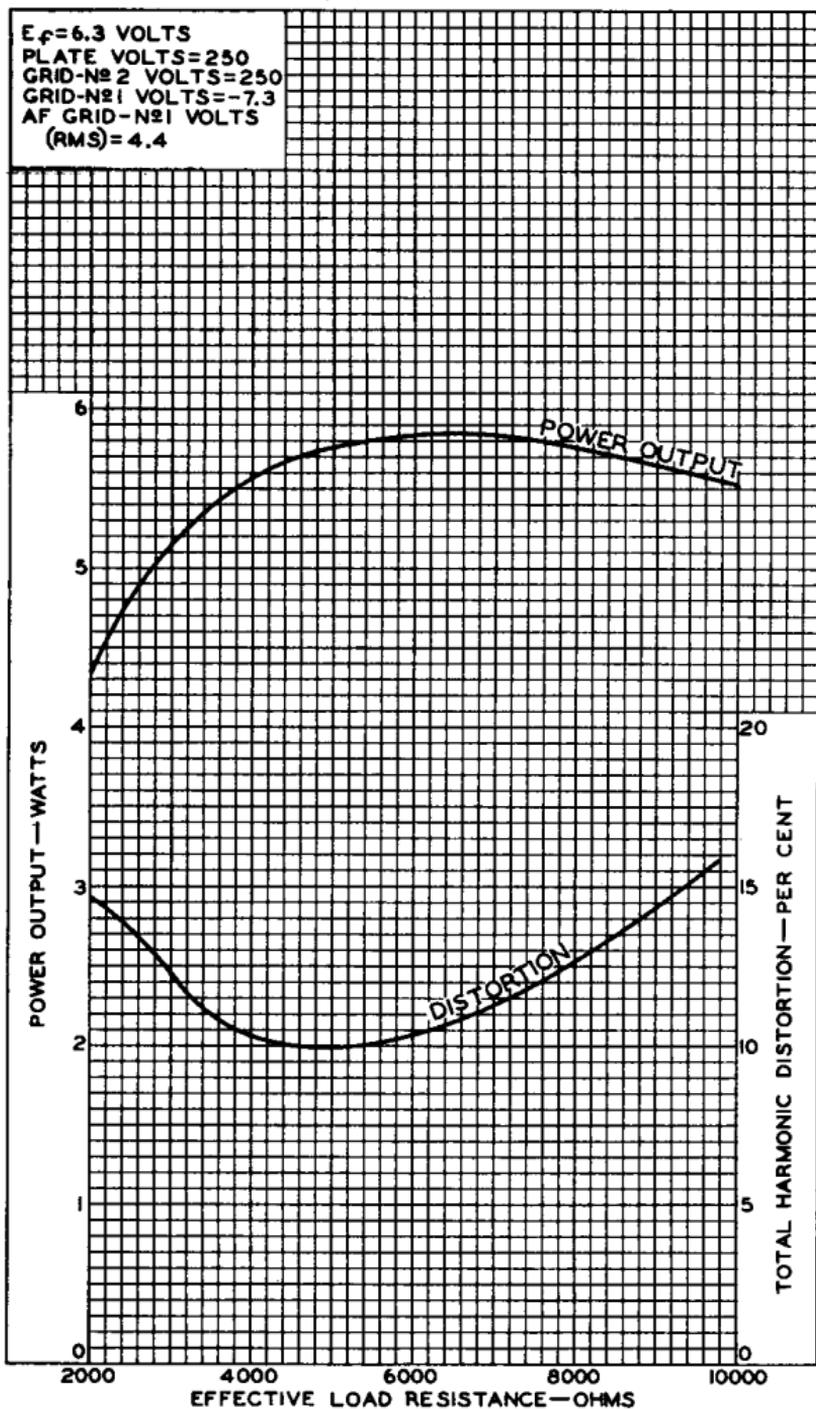

92CM-9902

