
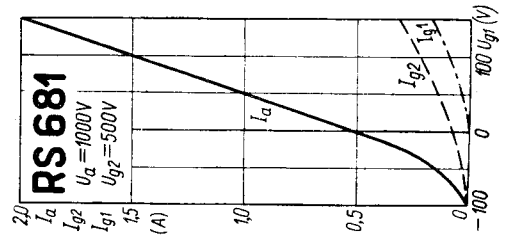
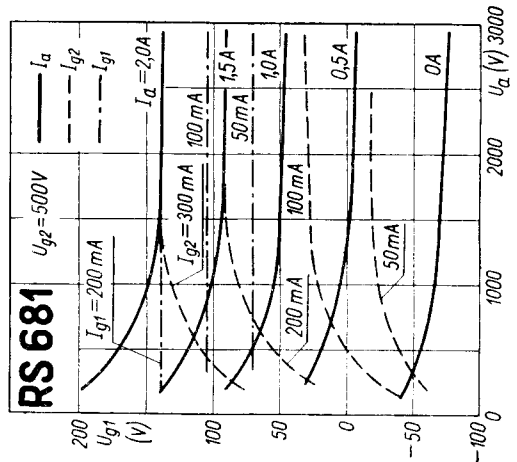
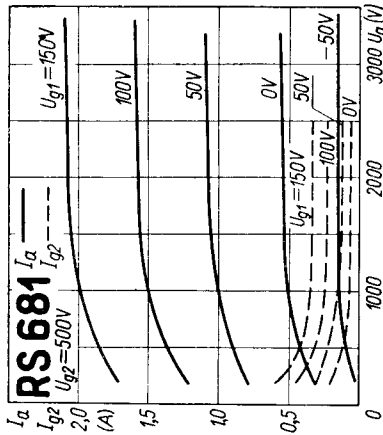


T.	Image	Image	$U_f$ V	$I_f$ A	Cl.	f MHz	$U_a$ V	$U_{g2}$ V	$U_{g1}$ V	$I_a$ mA	$I_{g2}$ mA	$I_{g1}$ mA	$U_{g1} \approx$ V	$P_{dr}$ W	$P_o$ W	$P_{g2}$ W	$P_a$ W
RS 681	Tlf	1	$10 \pm 5\%$	9	C-Tgr B-Tlf stat	$\begin{cases} < 6 \\ < 100 \\ < 6 \end{cases}$ $\left. \begin{matrix} \\ \\ \end{matrix} \right\} 150$	$\begin{matrix} 4000 \\ 3500 \\ 3500 \\ 1000 \\ 4000 \end{matrix}$	$\begin{matrix} 450 \\ 450 \\ 450 \\ 500 \\ 500 \end{matrix}$	$\begin{matrix} -140 \\ -150 \\ 90 \\ -500 \end{matrix}$	$\begin{matrix} 400 \\ 430 \\ 430 \\ 400 \end{matrix}$	$\begin{matrix} 100 \\ 80 \\ 100 \\ 400 \end{matrix}$	$\begin{matrix} 30 \\ 25 \\ 30 \end{matrix}$	$\begin{matrix} 240 \\ 250 \\ 160 \end{matrix}$	$\begin{matrix} 7,5 \\ 35 \\ 5 \end{matrix}$	$\begin{matrix} 1150 \\ 1000 \\ 1000 \end{matrix}$	$\begin{matrix} 60 \\ 60 \\ 60 \end{matrix}$	$\begin{matrix} 500 \\ 500 \\ 500 \end{matrix}$

$S = 9,5 \div 11,5 \text{ mA/V}; f_{(g2/g1)} 5,4 \div 6,4 \text{ maximum}$



$C_{g1}$	$C_a$	$C_{g1/a}$
pF	pF	pF
23 ÷ 28	9 ÷ 11	0,15

Equivalent

SRS 401	RFT

