



18FX6

18FX6

PENTAGRID CONVERTER

7-PIN MINIATURE TYPE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage (AC or DC)	18 ± 10%	volts
Current	0.1	amp


Direct Interelectrode Capacitances:

	<i>Without External Shield</i>	<i>With External Shield^o</i>	
Grid No.3 to all other electrodes (RF input)	7	7	μf
Plate to all other electrodes (Mixer input)	8	13	μf
Grid No.1 to all other electrodes (Oscillator input)	5.5	5.5	μf
Grid No.3 to plate.	0.30 max.	0.25 max.	μf
Grid No.3 to grid No.1.	0.15 max.	0.15 max.	μf
Grid No.1 to plate.	0.1	0.05	μf
Grid No.1 to cathode & grid No.5.	3	3	μf
Cathode & grid No.5 to all other electrodes except grid No.1	15	20	μf

Mechanical:

Operating Position.	Any
Maximum Overall Length.	2-1/8"
Maximum Seated Length	1-7/8"
Length, Base Seat to Bulb Top (Excluding tip).	1-1/2" ± 3/32"
Diameter.	0.650" to 0.750"
Dimensional Outline	See General Section
Bulb.	T5-1/2
Base.	Small-Button Miniature 7-Pin (JEDEC No.E7-1)
Basing Designation for BOTTOM VIEW.	7CH

- Pin 1 - Grid No.1
- Pin 2 - Cathode, Grid No.5
- Pin 3 - Heater
- Pin 4 - Heater



- Pin 5 - Plate
- Pin 6 - Grid No.2, Grid No.4
- Pin 7 - Grid No.3

CONVERTER

Maximum Ratings, Design-Maximum Values:

PLATE VOLTAGE	150 max.	volts
GRIDS-No.2 & No.4 (SCREEN-GRIDS) SUPPLY VOLTAGE.	150 max.	volts
GRIDS-No.2 & No.4 VOLTAGE	110 max.	volts
GRIDS-No.2 & No.4 INPUT	1.2 max.	watts
PLATE DISSIPATION	1 max.	watt

18FX6



18FX6

PENTAGRID CONVERTER

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode.	100 max.	volts
Heater positive with respect to cathode.	100 max.	volts

Characteristics:

*With Separate Excitation**

Plate Voltage	100	volts
Grids-No.2 & No.4 Voltage	100	volts
Grid-No.3 Voltage	-1.5	volts
Grid-No.1 Resistor.	20000	ohms
Plate Resistance (Approx.).	0.4	megohm
Conversion Transconductance	480	μ hos
Plate Current	2.3	ma
Grids-No.2 & No.4 Current	6.2	ma
Grid-No.1 Current	0.5	ma
Total Cathode Current	9	ma
Grid-No.3 Voltage (Approx.) for conversion transconductance (μ hos) = 10.	-21	volts

Oscillator Characteristics (Not Oscillating):[■]

Plate & Grids-No.2 & No.4 Voltage . . .	100	volts
Grid-No.3 Voltage	0	volts
Grid-No.1 Voltage	0	volts
Amplification Factor	22	
Oscillator Transconductance†.	7000	μ hos
Cathode Current	24	ma
Grid-No.1 Voltage (Approx.) for plate μ a = 20	-9.2	volts

^o With external shield JEDEC No.316 connected to cathode.


* The characteristics shown with separate excitation correspond very closely with those obtained in a self-excited-oscillator circuit operating with zero bias.

■ With grids No.2 & No.4 connected to plate.

† Between grid No.1 and grids No.2 & No.4 connected to plate.

AVERAGE CHARACTERISTICS

$E_f = 18$ VOLTS
 PLATE VOLTS = 100
 GRIDS - N^o 2 & N^o 4 VOLTS = 100
 GRID - N^o 1 MILLIAMPERES = 0.5
 GRID - N^o 1 RESISTOR (OHMS) = 20 000
 SEPARATE EXCITATION.

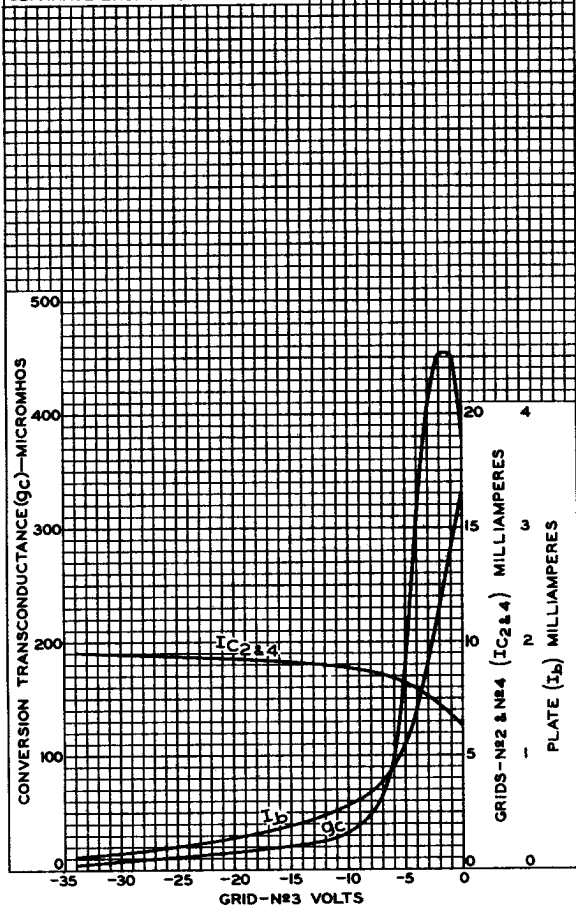


92CM-10777



18FX6

AVERAGE CHARACTERISTICS

$E_f = 18$ VOLTS
PLATE VOLTS=100
GRIDS-N^o 2 & N^o 4 VOLTS=100
GRID-N^o 3 VOLTS=-1.5
GRID-N^o 1 RESISTOR (OHMS) = 20000
SEPARATE EXCITATION.

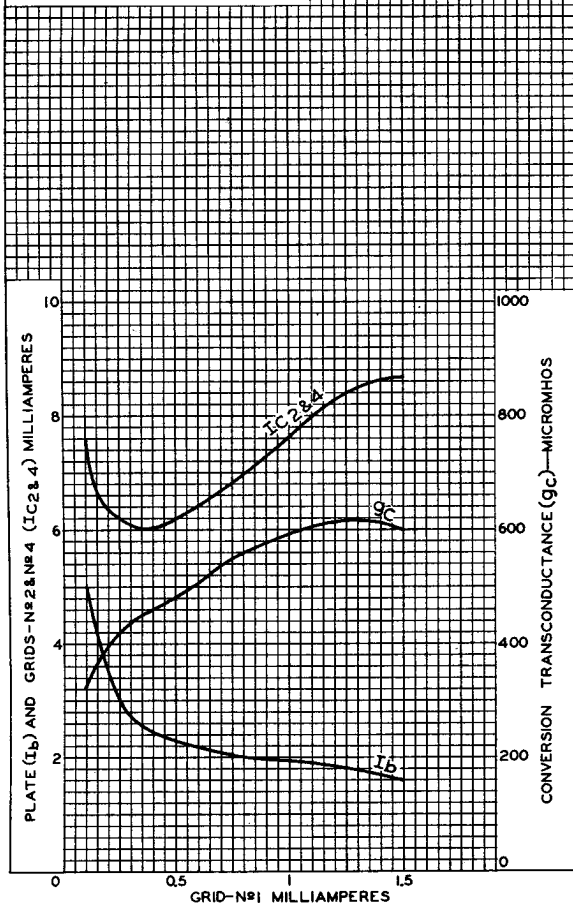

92CM-10782

